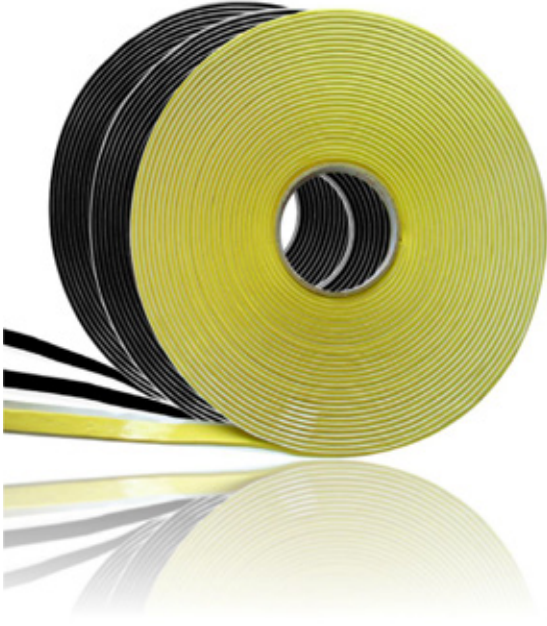


COMPEX™ W-700
Sealant Tape**PERFORMANCE**

Solids	: >99%
Specific Gravity (g/cm³)	: 1.4±0.1g/cm ³
Service Temperature Range	: -40°C to 180°C
Application Temperature Range	: 5°C to 50°C
Life Expectancy	: 20 Years
Penetration 1/10MM, 20°C±2 ,ISO 5S	: 65±10
Heat Resistance	: 120°C for 12 hours, 180°C for 3 hours.
Shear Strength	: ≥0.06MPa

PRODUCT DESCRIPTION

Compex™ W-700 Sealant Tape is developed for blade and aerospace industry, yacht industry, etc. Based on advanced technology, the products have high surface adhesion force on vacuum bag and a variety of tools. In the curing cycle it has excellent seal and very easy to remove from the cold or heating surface after the curing.

USAGE/PURPOSE

Uses for sealing of the mould in blade, yacht industry.

COLOR

Black or yellow.

APPLICATION

All surfaces should be free from dust, grease oil, loose mortar and any other foreign material.

Apply direct onto the surface and press sufficiently along its whole length to achieve good initial adhesion;

Remove the backing paper and offer other surface to the tape and push firmly to seal across the joint.

SIZE & PACKING

3mm x 12mm x 15m
150m/carton

SHELF LIFE

24 months in original packing.

STORAGE

Stored in a dry and cool condition.

CONTACT US:

Shadowline Polimer / Atatürk Mahallesi Erzincan Sokak No:19 34758 Ataşehir, İstanbul/Türkiye
T: + 90 216 575 1162 | F: + 90 216 577 2549 | info@shadowline.com.tr