

LEXAN™ 9030TG SHEET

PRODUCT DATASHEET

DESCRIPTION

LEXAN™ 9030TG based polycarbonate sheet is the standard grade of LEXAN sheet. Inherently high impact UV stabilized LEXAN 9030TG sheet is an excellent candidate for glazing for economical protection against breakage or intrusion. As LEXAN has, better insulation properties than glass it may contribute to lower energy costs. LEXAN 9030TG sheet may be thermoformed, pressure formed, cold-formed or used in flat applications.

TYPICAL PROPERTY VALUES

PROPERTY	TEST METHOD	UNITS	VALUE 9030TG *
PHYSICAL			
Specific Gravity	ASTM D792	-	1.20
Refractive Index @ 77°F	ASTM D542A	-	1.586
Light Transmission (Average at 0.118")	ASTM D1003	%	86
Initial Haze		HU	<1
Rockwell Hardness (M scale)	ASTM D785	-	70
Rockwell Hardness (R scale)	ASTM D785		118
Taber @ 100 cycles	ASTM D1044		
	(ANSI Z126.1)	% haze	10
Water Absorption, 24 hrs	ASTM D570	%	0.15
Water Absorption, Equilibrium	@ 73°F	%	0.35
MECHANICAL			
Tensile Strength, Yield	ASTM D638	psi	9,500
Tensile Modulus	ASTM D638	psi	345,000
Flexural Strength	ASTM D790	psi	13,500
Flexural Modulus	ASTM D790	psi	345,000
Compressive Strength	ASTM D695	psi	12,500
Compressive Modulus	ASTM D695	psi	345,000
Poisson's Ratio	ASTM E132	-	0.37
Izod Impact Strength Notched @ 0.118"	ASTM D256A	ft-lbs/in	12-16
Unnotched @ 0.118"			60
			(no failure)
Shear Strength @ Yield	ASTM D732	psi	6,000
Shear Modulus	ASTM D732	psi	114,000
THERMAL			
Coefficient of Thermal Expansion	ASTM D696	in/in/°F	3.75 x10 ⁻⁵
Coefficient of Thermal Conductivity	ASTM C177	Btu•in/hr•ft ² •°F	1.35

PROPERTY	TEST METHOD	UNITS	VALUE 9030TG *
Specific Heat @ 40°C	ASTM C351	BTU/lb-°F	0.30
Heat Deflection Temperature @ 264 psi	ASTM D648	°F	270
@ 66 psi			280
Brittle Temperature (on resin)	ASTM D746	°F	-211
FLAMMABILITY			
Horizontal Burn (Flame Spread) AEB	ASTM D635	in	<1
Ignition Temperature, Self		°F	>1000
UL Flammability (File # 121562)			
ELECTRICAL			
Dielectric Constant @ 60 Hz	ASTM D150	—	3.17
Volume Resistivity	ASTM D257	Ohm-cm	8.2 x 10 ¹⁶
Dissipation Factor (@60 Hz) also known as Power Factor	ASTM D150		0.0009

◆ These typical values are not intended for specification purposes. If minimum certifiable properties are required, please contact your local SABIC representative.
 ™ Trademark of SABIC.


IMPACT RESISTANCE¶

¼" LEXAN 9030TG Sheet

¼" Acrylic

¼" Tempered Glass

¼" Laminated Glass

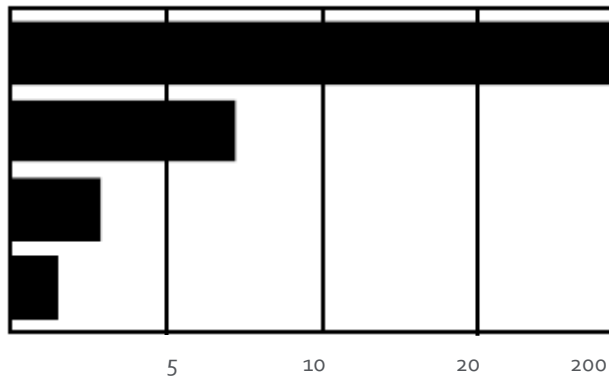

¶) Drop Dart Test with a 5-lb steel dart and a 1" diameter tip.

Measured in foot-pounds

PRODUCT AVAILABILITY

Standard Width in/mm:	50.39"/1280mm	49.21"/1250mm	
Standard Gauge	0.03", 0.04", 0.06"	0.118", 0.236"	0.118", 0.236"
	0.75mm, 1mm, 1.5mm	2mm, 3mm, 6mm,	2mm, 3mm, 6mm,
Standard Length in/mm:	96"		
	2439mm		
Standard Colors:	Clear 112, Please contact your sales representative for other color availability		

80 inch width is possible, pls. contact your sales representative for details

CONTACT US:

MIDDLE EAST AND AFRICA

SABIC Global Headquarters
PO Box 5101
Riyadh 11422
Saudi Arabia
T +966 (0) 1 225 8000
F +966 (0) 1 225 9000
E info@sabic.com

AMERICAS

Functional Forms
2500 City West Boulevard
Suite 100
Houston, TX 77042
USA
Inside sales:
Toll-free (800) 323 3783
F (888) 443 2033
E spinside.sales@sabic.com

EUROPE

Functional Forms
Plasticslaan 1
4612 PX
Bergen op Zoom
The Netherlands
T +31 164 293684
F +31 164 292272
E ff.info@sabic.com

ASIA PACIFIC

Functional Forms
2550 Xiupu Road
Pudong
201319 Shanghai
China
T +86 21 3222 4500
F +86 21 6289 8998
E ff.info@sabic.com



DISCLAIMER: THE MATERIALS, PRODUCTS AND SERVICES OF SAUDI BASIC INDUSTRIES CORPORATION (SABIC) OR ITS SUBSIDIARIES OR AFFILIATES ("SELLER") ARE SOLD SUBJECT TO SELLER'S STANDARD CONDITIONS OF SALE, WHICH ARE AVAILABLE UPON REQUEST. INFORMATION AND RECOMMENDATIONS CONTAINED IN THIS DOCUMENT ARE GIVEN IN GOOD FAITH. HOWEVER, SELLER MAKES NO EXPRESS OR IMPLIED REPRESENTATION, WARRANTY OR GUARANTEE (i) THAT ANY RESULTS DESCRIBED IN THIS DOCUMENT WILL BE OBTAINED UNDER END-USE CONDITIONS, OR (ii) AS TO THE EFFECTIVENESS OR SAFETY OF ANY DESIGN OR APPLICATION INCORPORATING SELLER'S MATERIALS, PRODUCTS, SERVICES OR RECOMMENDATIONS. UNLESS OTHERWISE PROVIDED IN SELLER'S STANDARD CONDITIONS OF SALE, SELLER SHALL NOT BE RESPONSIBLE FOR ANY LOSS RESULTING FROM ANY USE OF ITS MATERIALS, PRODUCTS, SERVICES OR RECOMMENDATIONS DESCRIBED IN THIS DOCUMENT. Each user is responsible for making its own determination as to the suitability of Seller's materials, products, services or recommendations for the user's particular use through appropriate end-use and other testing and analysis. Nothing in any document or oral statement shall be deemed to alter or waive any provision of Seller's Standard Conditions of Sale or this Disclaimer, unless it is specifically agreed to in a writing signed by Seller. Statements by Seller concerning a possible use of any material, product, service or design do not, are not intended to, and should not be construed to grant any license under any patent or other intellectual property right of Seller or as a recommendation for the use of any material, product, service or design in a manner that infringes any patent or other intellectual property right. SABIC and brands marked with ™ are trademarks of SABIC or its subsidiaries or affiliates, unless otherwise noted.

© 2021 Saudi Basic Industries Corporation (SABIC). All Rights Reserved.

Any brands, products or services of other companies referenced in this document are the trademarks, service marks and/or trade names of their respective holders.

www.sabic.com/sfs